




**VISTA
PROFESSIONAL
OUTDOOR
LIGHTING**
A Division of U.S.T.E., Inc.



Fixture shown in optional Stanchion Mount configuration
with CM150 Top Mount and SM118 Mounting Post

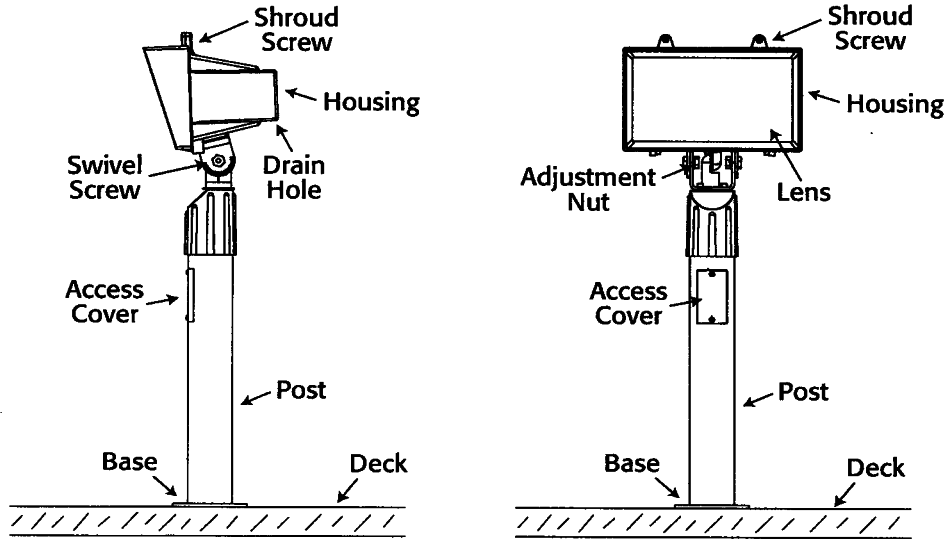

| Lamp Information | | |
|------------------|-----------|------------|
| Cat. # | Lamp Type | Max. Watts |
| 1035 | ED-17 | 100 |

INSTALLATION INSTRUCTIONS FOR
LINE VOLTAGE UP AND ACCENT
MODEL #1035

WARNING: Luminaire must be installed and grounded in accordance with the National Electrical Code (NEC) and local codes. For portable spear or surface mount using a cord and plug, the luminaire must be plugged into a receptacle protected by a ground fault circuit interrupter (GFI). Failure to do so may result in serious injury and/or damage to the luminaire.

MAINTENANCE: To assure proper operation and efficiency and to prevent luminaire overheating, lens must be kept clean and free of dirt, dust, leaves, trash and mineral deposits from water. A regular schedule maintenance program is recommended.

SAFETY WARNING: Luminaire can become very hot depending on the lamp wattage used. Lens and housing around the lamp can become hot enough to blister hands. Particular care should be taken not to locate luminaires where small children can reach them if high wattage lamps are used.

NOTE: Always use UL recognized wire connectors for connections.

NOTE: Save these instructions for future reference.

TOOLS REQUIRED FOR INSTALLATION:

- Phillips head screwdriver
- Wire strippers
- Silicone grease
- 3/4" Wrench

Over
↳

INSTALLATION INSTRUCTIONS

NOTE: Model 1035 HID luminaire incorporates a built in ballast.

1. Make sure electrical supply is off at circuit breaker before starting luminaire installation or servicing luminaire.
2. Remove the two (2) service cover screws and service cover.
3. Attach luminaire leads to line in leads observing polarity, black to black, white to white and green to ground using silicone filled safety connectors (provided).
4. Replace service cover and tighten the two (2) service cover screws.
5. Attach luminaire to deck or other mounting surface with four lag screws (by others).
6. To adjust luminaire aiming angle, loosen swivel screw and the two 3/4" nuts on yoke. Hold luminaire at selected angle and tighten swivel screw firmly. Tighten the two 3/4" nuts firmly.
7. Loosen screws from shroud and remove shroud and O-ring to expose socket. Install lamp.
8. Install shroud and O-ring and tighten screws evenly.
9. Coat all exposed screws with silicone grease.
10. Supply power to the luminaire and check for proper operation.

NOTE: Your Vista Up and Accent luminaires are provided with high temperature drain plugs.
If your luminaire is installed in the up or above horizontal position, do not install the drain plugs.
If your luminaire is installed in the down or below horizontal position, ALWAYS install the drain plugs.

LAMP INSTALLATION/REPLACEMENT:

CAUTION: Do not exceed maximum wattage marked on luminaire label.

1. To prevent electrical shock, disconnect from electrical supply before service.
2. Loosen screws from shroud.
3. Remove shroud and O-ring to expose lamp.
4. Replace lamp with correct wattage and type marked on fixture label.
5. Clean shroud and O-ring channel.
6. Re-install shroud and tighten screws evenly.